

# DLS4302

43" TFT LCD, 400 nits, FHD(1920x1080) SDM Solutions



SDM Ready Display




## Key Features

- Brightness: 400nits
- LED Backlight
- Low Power Consumption
- Slim Bezel
- Support Intel® SDM-S/SDM-L
- Wifi Support

## Product Specification

DLS4302	
Description	43" TFT LCD,400nits, FHD(1920x1080) SDM Solutions
Screen size	43"
Display area (mm)	940.7(H) x 529.2(V)
Brightness	400 cd/m2
Resolution	1920x1080
Aspect ratio	16 : 9
Contrast ratio	1200 : 1
Pixel pitch (mm)	0.49(H) x 0.49(V)
Pixel per inch (PPI)	51
Viewing angle	178°(H),178°(V)
Color saturation (NTSC)	75%
Display colors	16.7M
Response time (Typical)	8ms
Video interface	SDM-S/SDM-L interface
Input power	AC100~240V
Power consumption	106W (Panel Model Only)
Dimensions (mm)	964.7x 553.1 x 77.5
Bezel size (U/B/L/R)	10.4/10.4/10.4/10.4 mm
Weight (Net)	23kg
Mounting	VESA 400x200, 400x400
OSD key	4 Keys (Power Switch, Menu, +, -)
OSD control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Operating temperature	0 °C ~ 50 °C
Storage temperature	-20 °C ~ 60 °C
Product approval	CE, FCC

## Dimensic

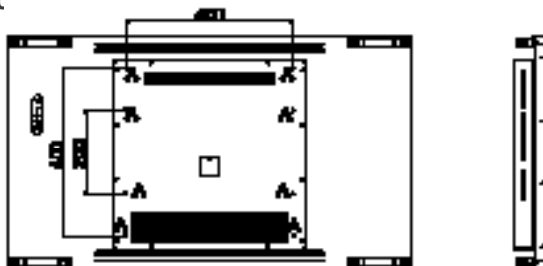

## SDM From Factor list

Part Number	Description
ASDM-APL5	SDM-L, Intel Apollo Lake CPU,COM/2USB/LAN

Page.33



ASDM-APL6	SDM-S, Intel Apollo Lake CPU.2USB/LAN, LPDDR4-4GB./ eMMC-32GB
-----------	---

Page.34



\* Slightly larger than a credit card

## Ordering Information

Part Number	Description
DLS4302-BNB-Q01	43",400nits,1920x1080,SDM, LID on LCM, AD8891, O/B,AC100~240V,V1

